

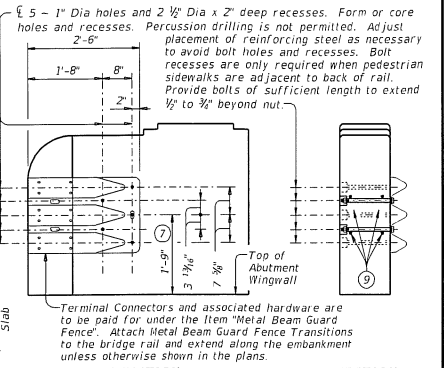


DISCLAIMER: The use of this standard is governed by the Texas Engineering Practice Act. No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion or this standard to other formats or for incorrect results or damages resulting from its use.

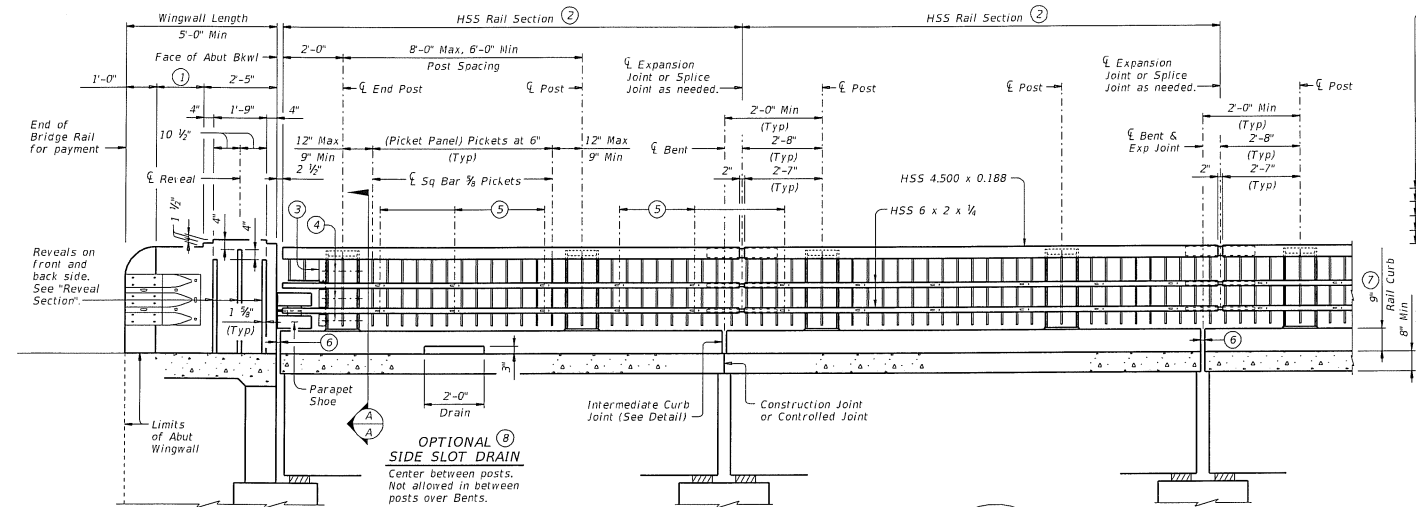


**SECTION TERMINAL CONNECTION DETAILS**

Reveals not shown for clarity.

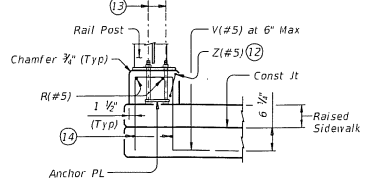

**SECTION THRU RAIL WITH RAISED SIDEWALK**


This leg may be field bent or cut only as necessary to provide 2\"/>

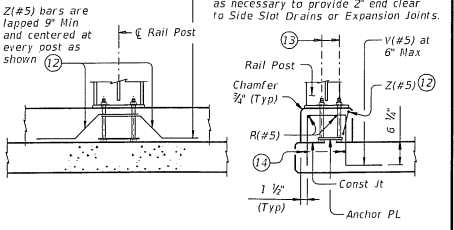


**SECTION AT POST**

Bars V and R omitted for clarity.


SHEET 1 OF 4

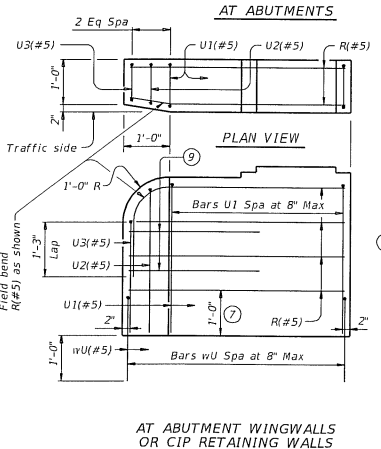


**AT ABUTMENT WINGWALLS OR CIP RETAINING WALLS**

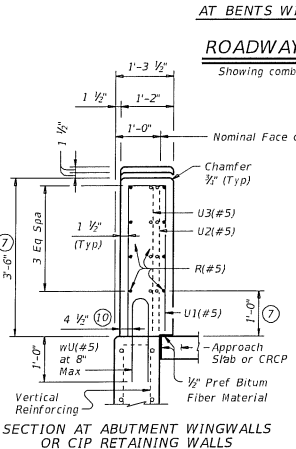

**SECTION AT ABUTMENT WINGWALLS OR CIP RETAINING WALLS**

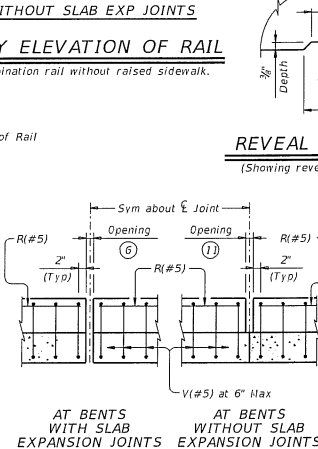


**SECTION AT BENTS WITH SLAB EXP JOINTS**

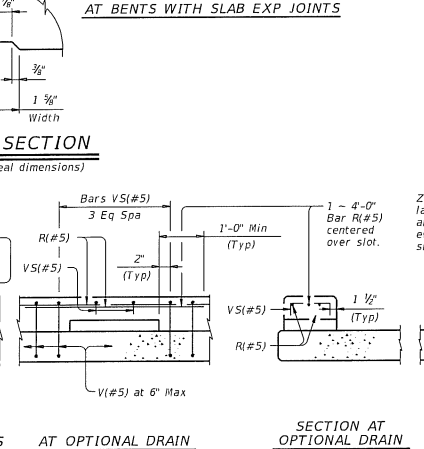

**SECTION AT BENTS WITHOUT SLAB EXP JOINTS**

**SECTION AT OPTIONAL DRAIN**

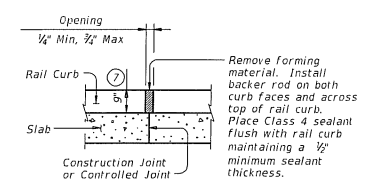

**INTERMEDIATE CURB JOINT DETAIL**


Showing without raised sidewalk. Provide at all interior bents without slab expansion joints. Location independent of HSS rail splices.

- ① Wingwall length minus 3'-5" (Variable) 1'-7" Min.
- ② HSS rail sections must have at least two posts but not more than four.
- ③ See "Picket End Panel Detail".
- ④ Bolt locations for attaching picket end panel to end post.
- ⑤ Bolt locations for attaching picket panel to back of HSS 6 x 2 x 1/4. See "Section M-M".
- ⑥ Same as slab joint opening. (5" Max Expansion Joint)
- ⑦ Increase 2" for structures with overlay.
- ⑧ Drains may be used where shown elsewhere on the plans or as directed by the Engineer. Do not place drains over railroad tracks, lower roadways, or sidewalks. When this rail is used as a separator between a roadway and a sidewalk, side slot drains are not permitted.
- ⑨ Place 4 additional Bars R(#5) 3'-8" in length inside Bars U(#5) and centered 2'-0" from end of rail when Terminal Connections are required. Field bend as needed.
- ⑩ 5/8" when vertical reinforcing has closer clear cover over horizontal reinforcing in abutment wingwalls or retaining walls on traffic side of wall.
- ⑪ 1/2" Min, 3/4" Max.
- ⑫ Adjust Bars Z(#5) as necessary to avoid Bars V(#5).
- ⑬ 5/8" Dia Anchor Bolts. See "Anchor Bolt Assembly Details".
- ⑭ Top longitudinal slab bar may be adjusted laterally 3" plus or minus to tie reinforcing.



<p><b>COMBINATION RAIL</b></p> <p><b>TYPE C2P</b></p>			
FILE: r18td013-18dgn	DR: TxDOT	CR: TAR	DN: JTR
CS: TAR	REV: 03/2018	DATE: 03/2018	REV: 03/2018
REV: 03/2018	REV: 03/2018	REV: 03/2018	REV: 03/2018
REV: 03/2018	REV: 03/2018	REV: 03/2018	REV: 03/2018

DATE: FILE:


DISCLAIMER: This assembly is reviewed by the Texas Engineering Practices, Inc. on behalf of any kind is made by TADD for any purpose whatsoever. TADD assumes no responsibility for the completion of this standard or for incorrect results or damages resulting from its use.

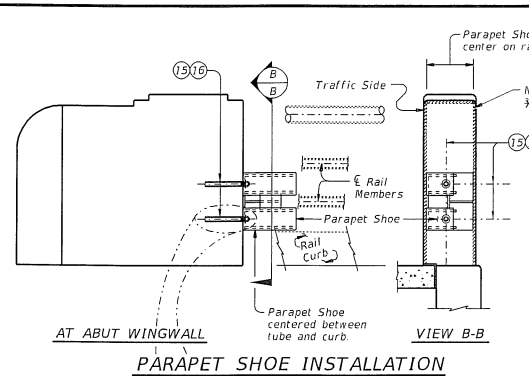


**PARAPET SHOE INSTALLATION**




**SECTION THRU BRIDGE RAIL IN BETWEEN POSTS**

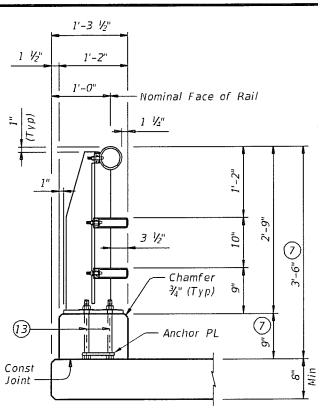

**SECTION THRU BRIDGE RAIL AT POST**

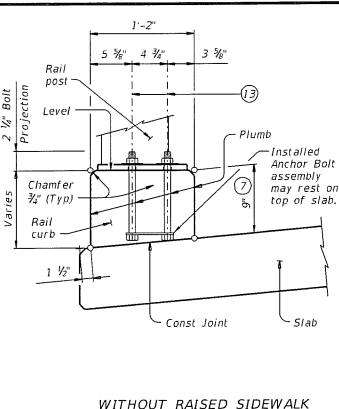


**WITHOUT RAISED SIDEWALK**

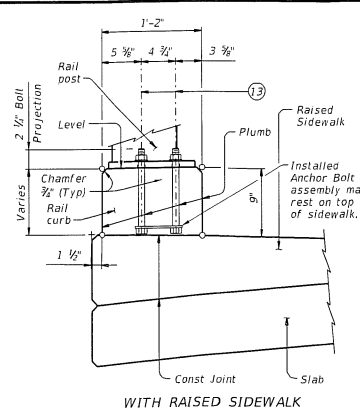


**WITH RAISED SIDEWALK**


**RAIL CURB FORMING DETAIL**

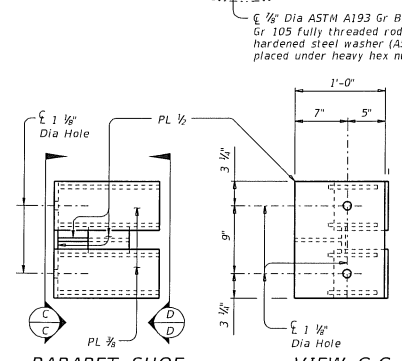


**VIEW C-C**

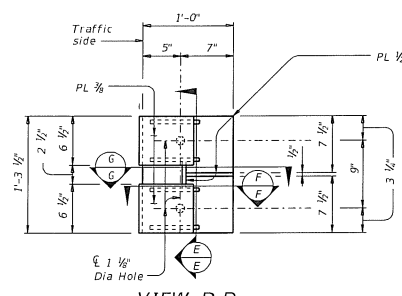


**VIEW D-D**



**SECTION E-E**

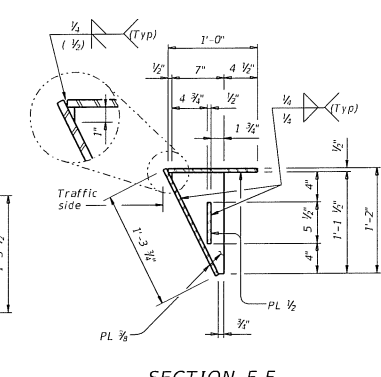

**SECTION F-F**

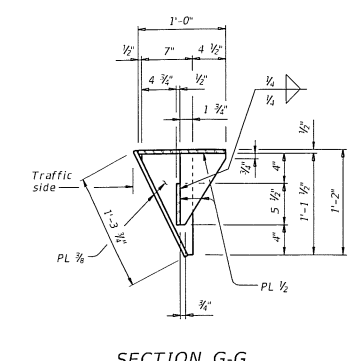

**SECTION G-G**

1/2" Dia ASTM A193 Gr B7 or F1554 Gr 105 fully threaded rod with one hardened steel washer (ASTM F436) placed under heavy hex nut (ASTM A563).

Reinforcing steel not shown for clarity. Shown without raised sidewalk.

Reinforcing steel not shown for clarity. Shown without raised sidewalk.

Reinforcing steel not shown for clarity.

**PARAPET SHOE**

Parapet Shoe weight = 78 lb each, for contractor's information only.

17 Increase 2" for structures with overlay.

18 1/2" Dia Anchor Bolts. See "Anchor Bolt Assembly Details".


19 Anchor bolts must be 1/2" Dia ASTM A193 Gr B7 or F1554 Gr 105 fully threaded rods with heavy hex nuts and one hardened steel washer (ASTM F436) each. Nuts must conform to ASTM A563 requirements. Embed fully threaded rods into parapet wall with a Type III, Class C, D, E, or F anchor adhesive. Adhesive anchor embedment depth is 8". Anchor installation, including hole size, drilling, and clean out, must be in accordance with Item 430, "Railings".

16 Install Parapet Shoe after rail has been placed. To ease installation, temporarily brace parapet shoe until the anchorage system achieves manufacturer's recommended curing time. Anchorage system must be assembled with one hardened steel washer (ASTM F436) and one heavy hex nut (ASTM A563) each. Remove temporary bracing after anchorage systems has been firmly tightened.


17 Length shown for 6 1/2" Min bar embedment with no overlay. Adjust as required.

18 Increase 2 3/4" for structures with overlay.


19 For raised sidewalks, add sidewalk height to total bar height. Use sidewalk height at rail's location.




**BARS U(#5)**




**BARS wU(#5)**



**BARS V(#5)**



**BARS VS(#5)**



**BARS Z(#5)**


Installed Bars Z leg may rest on top of deck. (Typ)

DATE: FILE:


		<b>Bridge Division Standard</b>	
<h2>COMBINATION RAIL</h2>			
<h3>TYPE C2P</h3>			
FILE: r18ed013-18.dgn	DN: TADD	YX: TAJ	DN: JTR
REV: March 2018	REV: 1	REV: 1	REV: 1
REV: 1	REV: 1	REV: 1	REV: 1
REV: 1	REV: 1	REV: 1	REV: 1

DISCLAIMER: This standard is governed by the Texas Engineering Practices Act. No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: \_\_\_\_\_  
FILE: \_\_\_\_\_

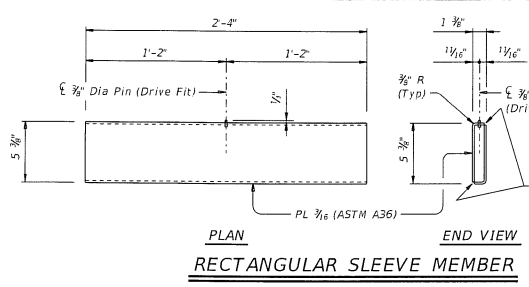


**PLAN**  
**END VIEW**  
**RECTANGULAR SLEEVE MEMBER**

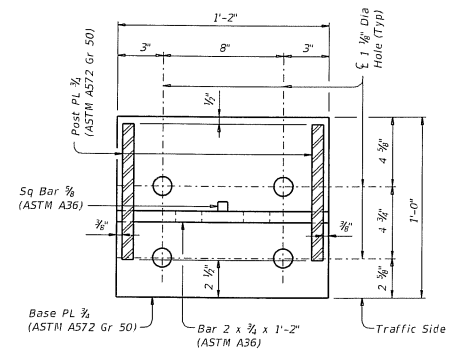

**SECTION I-I**

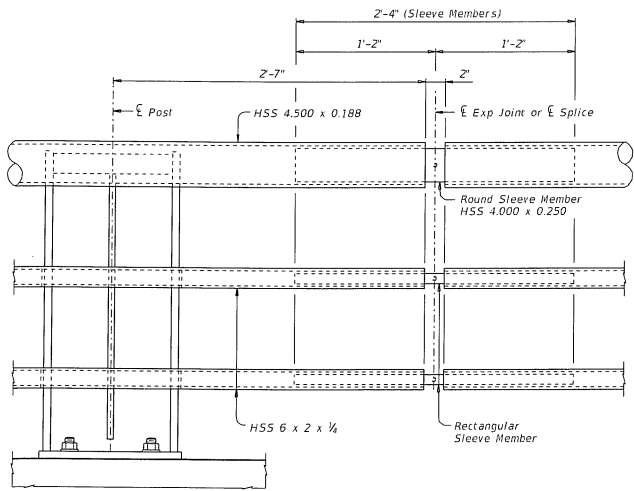


**EXPANSION JOINT OR SPLICE**  
Picket panels not shown for clarity.

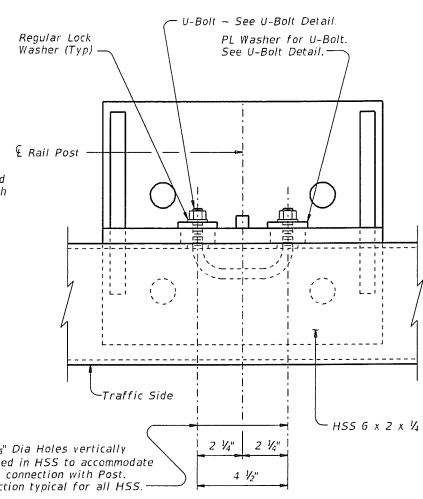


**TOP VIEW OF RAIL POST**


Showing connection for rail post and HSS 6 x 2 x 1/4.  
HSS 4.5 x 0.188 not shown for clarity.  
HSS 4.5 x 0.188 connection similar.



**END CAP DETAIL**  
HSS end cap at parapet.




**ROUND SLEEVE MEMBER**



**RECTANGULAR SLEEVE MEMBER**


**SECTIONS THRU SLEEVE MEMBERS**

Sections shown at Exp Joint or Splice

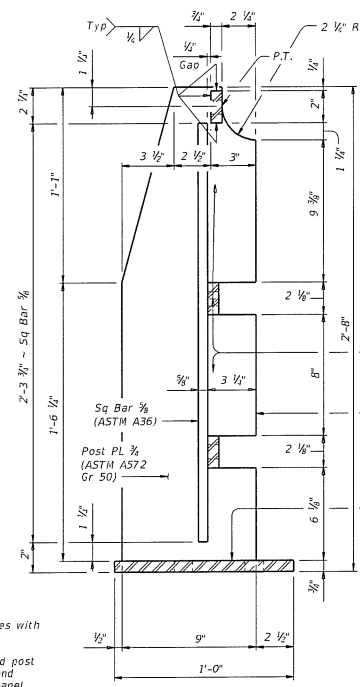


**SECTION H-H**

- ⑦ Increase Z' for structures with overlay.
- ⑩ See "Section A-A" for end post hole placement in each end post PL for picket end panel.
- ⑪ 3 - 3/8" Dia holes in each end post PL. Attach picket end panel with 3 - 1/2" Dia hex head bolts (ASTM F3125 Gr A325) with one hardened steel washer (ASTM F436) placed under each hex head and one hardened steel washer (ASTM F436) and one regular lock washer placed under each heavy hex nut (ASTM A563).

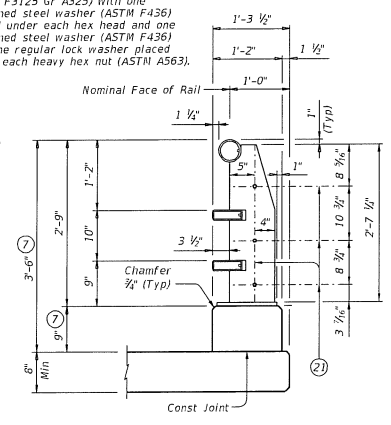


**SECTION A-A**

Showing end post 3/8" Dia hole placement in each post PL for picket end panel. Shown without raised sidewalk. Reinforcing steel not shown for clarity.

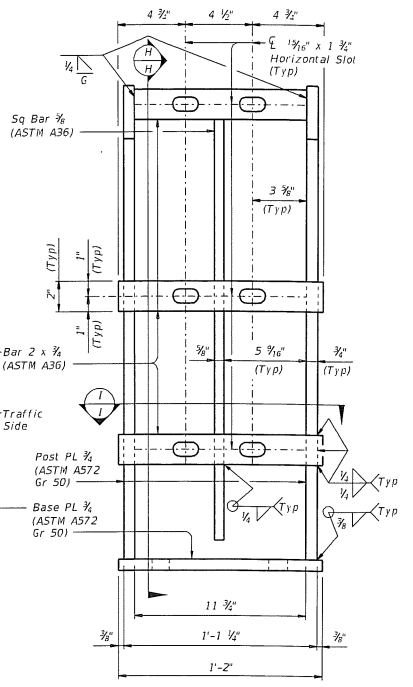

**POST DETAIL**

Showing Traffic Side of Post

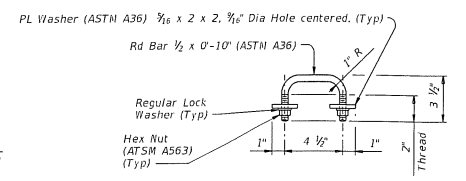

**U-BOLT DETAIL**

(Showing U-Bolt for rail post and HSS)

SHEET 3 OF 4

**COMBINATION RAIL**

**TYPE C2P**

FILE: F15c013-18.dgn	DR: TADOT	CK: JAR	DWN: JTR	CR: JAR
① TADOT March 2018	CONST	SECT	HRB	HIGHWAY
REVISIONS				
BY: _____	COUNT	SHEET NO.		

Texas Department of Transportation  
Bridge Division Standard

DISCUSS: This standard is governed by the Texas Engineering Practices Act. No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

① Increase 2" for structures with overlap.


② 3 - 3/8" Dia holes. Attach picket end panel to end post with 3 - 1/2" Dia heavy hex head bolts (ASTM F3125 Gr A325) with one hardened steel washer (ASTM F436) placed under each hex head and one hardened steel washer (ASTM F436) and one regular lock washer placed under each heavy hex nut (ASTM A563).

③ Sq Bar 3/8" (ASTM A36) spaced at 6".

④ Bolt locations for attaching picket panel to back of HSS 6 x 2 x 1/4. Six 1/2" Dia heavy hex head bolts (ASTM F3125 Gr A325) with one hardened steel washer (ASTM F436) placed under each hex head and one hardened steel washer (ASTM F436) placed under each heavy hex nut (ASTM A563) required per picket panel. 1/2" x 3 1/2" Horizontal Slot in 3/8" x 1 1/2" Bar for 1/2" Dia heavy hex head bolts (ASTM F3125 Gr A325). See "Section M-M".

⑤ Bolt locations at ends of picket panel as shown. See "Roadway Elevation of Rail".

⑥ Bolt locations for attaching picket panel must always be in next adjacent picket panel bay from end of sleeve members to allow for joint movement, when sleeve members are present.




**SECTION K-K**

**CONSTRUCTION NOTES:**  
 The face of tubular sections and rail curb must be plumb unless otherwise approved by the Engineer. Steel posts must be square to the top of curb. Use epoxy mortar under post base plates if gaps larger than 1/16" exist. Bend tubes to required radius for curved rails. Shop drawings for approval are required for curved rails. One shop splice per rail member section is permitted with minimum 85 percent penetration. The weld may be square groove or simple vee groove. Grind smooth. Provide HSS end caps at parapet. Round or chamfer exposed edges of rail members and rail posts to approximately 1/16" by grinding. Chamfer all exposed concrete corners.

**MATERIAL NOTES:**  
 Provide ASTM A1085 or A500 Gr B for all HSS. Provide Grade 60 reinforcing steel. Epoxy coat or galvanize all reinforcing steel if slab bars are epoxy coated or galvanized. Galvanize all metal components of steel rail system. Apply additional coatings when shown elsewhere on the plans. When plans require paint over galvanizing, follow the requirements for painting galvanized steel in Item 445, "Galvanizing" and when field painting, Item 446, "Field Cleaning and Painting Steel". Sleeve members and anchor bolts must receive galvanization prior to installation and only field paint after installation unless directed otherwise by Engineer. Provide 1/2" Dia ASTM F3125 Gr A325 or A449 bolts (or ASTM A193 Gr B7 or F1554 Gr 105 threaded rods with one tack welded heavy hex nut each) with one hardened steel washer (ASTM F436) placed under each heavy hex nut. Nuts must conform to ASTM A563 requirements. Provide 1/2" Dia ASTM F3125 Gr A325 hex head bolts with one hardened steel washer (ASTM F436) placed under each hex head and one hardened steel washer (ASTM F436) and one regular lock washer placed under each heavy hex nut (ASTM A563). Provide 1/2" Dia round bar U-bolts (ASTM A36) with plate washers (ASTM A36) and regular lock washers placed under hex nuts that conform to ASTM A563 requirements. See "U-Bolt Detail". Provide Class "S" concrete. When Class "S" concrete for slab is HPC, include a minimum of 3 gallons of calcium nitrite inorganic corrosion inhibitor per cubic yard of Class "S" concrete. Provide bar laps, where required, as follows:  
 Uncoated or galvanized - #5 = 2'-0"  
 Epoxy coated - #5 = 3'-0"


**GENERAL NOTES:**  
 This rail has been successfully evaluated by full-scale crash test to meet MASH TL-4 criteria. This rail can be used for speeds of 50 mph and greater when a TL-3 rated guard fence transition is used. When a TL-2 rated guard fence transition is used, this rail can only be used for speeds of 45 mph and less. This railing cannot be used on bridges with expansion joints providing more than 5" movement or on cast-in-place retaining walls, unless otherwise noted. Rail anchorage details shown on this standard may require modification for select structure types. See appropriate details elsewhere in plans for these modifications. Submit erection drawings showing panel lengths, rail post spacing, and anchor bolt setting, to the Engineer for approval. Average weight of railing with no overlays:  
 203 plf total  
 131 plf (Conc)  
 72 plf (Steel).

Cover dimensions are clear dimensions, unless noted otherwise. Reinforcing bar dimensions shown are out-to-out of bar.




**PICKET END PANEL DETAIL**

Showing traffic side of picket end panel. Picket end panel is detailed for one side only, other side similar. For other side picket end panel must be built for opposite hand. Picket end panel weight = 27 lb each, for contractor's information only.

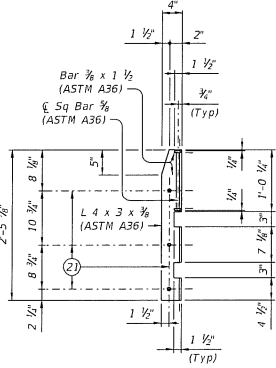


**SECTION J-J**

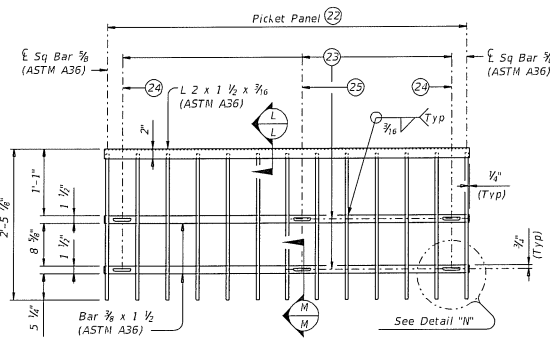


**PICKET PANEL DETAIL**


Showing field side of picket panel. 6'-0" Max picket panel weight = 70 lb each, for contractor's information only.



**SECTION L-L**




**PLAN OF ANCHOR PLATE**

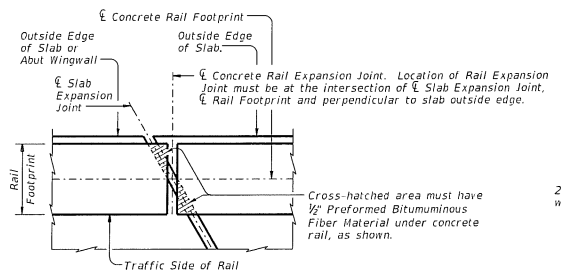


**PLAN OF RAIL AT EXPANSION JOINTS**

Example showing Slab Expansion Joints without breakbacks.

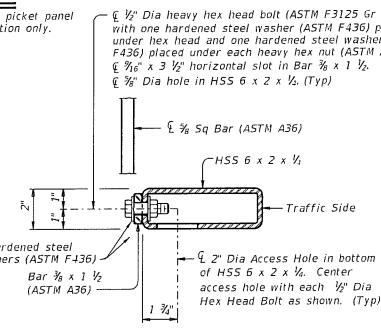


**SECTION M-M**

Showing Picket Panel connecting to HSS 6 x 2 x 1/4 (Typ)




**ELEVATION**

**ANCHOR BOLT ASSEMBLY DETAILS**

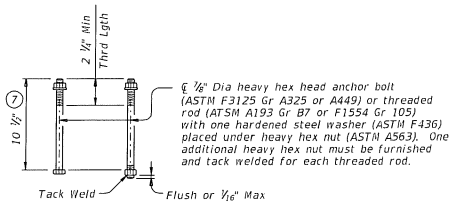

**ANCHOR BOLT OPTIONS**

(Showing Anchor Bolts for Base Plate)

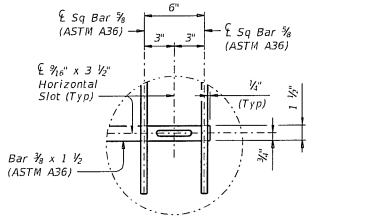

**DETAIL "N"**

**COMBINATION RAIL**

**TYPE C2P**

FILE:	HIS0013-18.dgn	DN:	TADOT	CK:	TAR	DR:	JTR	EX:	TAR
REVISED:	Mar 01 2018	CONST:	SECT:	JOB:	MISHAW				
BY:		CHKD:	CONVY		SHEET NO.				